




# Lexium 62 ILM

Multiaxis integrated servo drives for  
PacDrive 3 automation solution

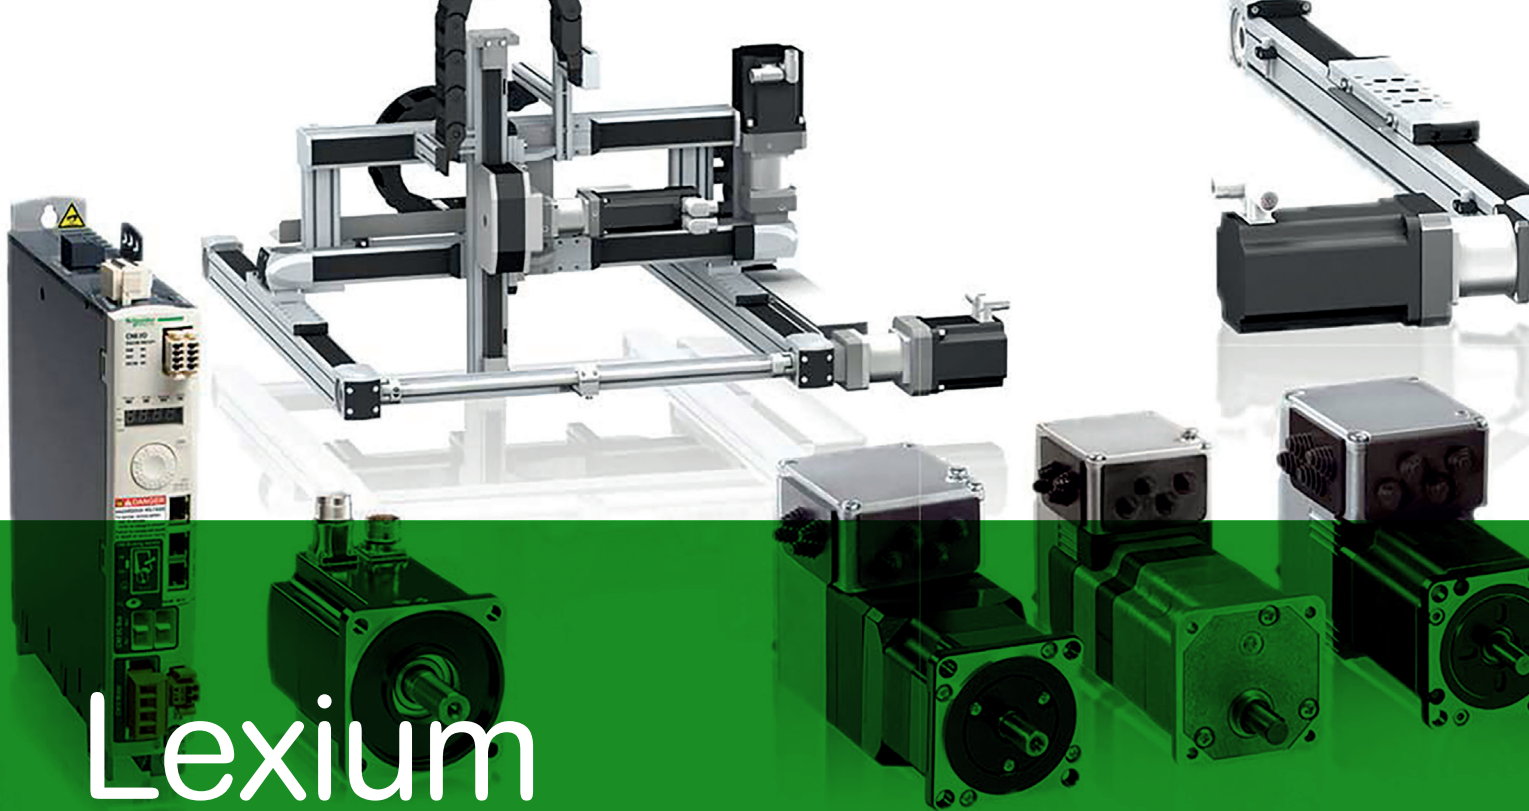

# Lexium

## Discover [Lexium](#)

Advanced motion control and robotics

Lexium servo drives, motors, and robotics series are designed for a broad range of motion-centric machines. From single-axis to high-performance multi-axis machines, the Lexium range enables high-speed movements and precise positioning in packaging, material handling, material working, electronics, and food and beverage applications.

## Explore our offer

- [Lexium](#) Servo Drives and Motors
- [Lexium](#) Integrated Servo Drives
- [Lexium](#) Robotics
- [Lexium](#) Stepper Drives

Life Is On

**Schneider**  
Electric


# Quick access to product information

## Get technical information about your product

**References**

**Modicon TM3 I/O expansion modules for Modicon controllers**  
Analog I/O modules


References	Modicon TM3 analog input modules	Input range	Resolution	Input terminal block (T)	Reference	Weight (kg)
2 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI201	0.150	
		16 bits of sign	0.002	TM3AI202	0.150	
4 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	12 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	
4 voltage/current or temperature inputs (I, K, R, S, E, T, N, E, C)	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	
4 differential temperature inputs (I, K, R, S, E, T, N, E, C)	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	
4 voltage/current	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	

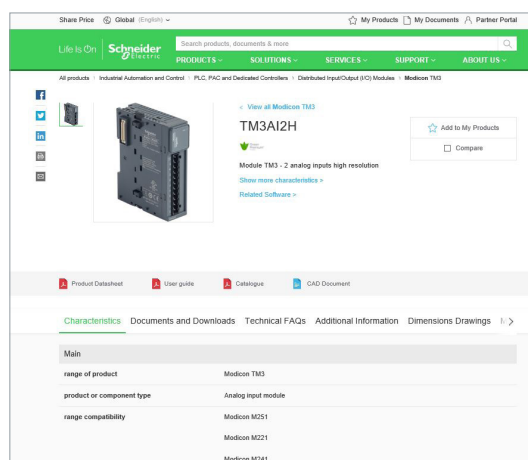


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

## Find your catalog

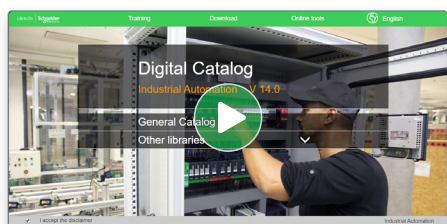

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

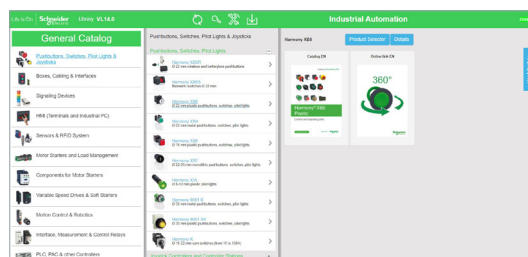


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

## Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

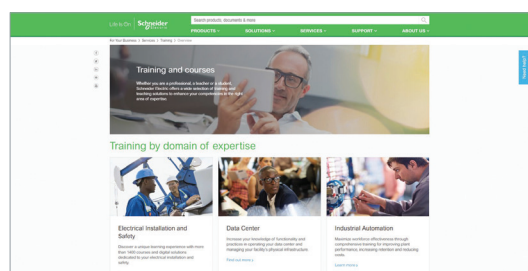

Life Is On

Schneider Electric

# General content

## Lexium 62 ILM

Multiaxis integrated servo drives for PacDrive 3 automation solution

■ EcoStruxure Machine presentation .....	page 2
■ Presentation.....	page 4
■ Type code .....	page 5
■ References	
- Lexium 62 ILM integrated drives.....	page 5
- Lexium 62 connection module (CM) .....	page 6
- Lexium 62 distribution box (DB).....	page 6
- Lexium 62 digital I/O module.....	page 7
■ Sercos installation	
- Hybrid cabling	
- Examples.....	page 8
■ Lexium 62 hybrid cable – references .....	page 8
■ Daisy chain cabling	
- Examples .....	pages 9 and 10
■ Connection box, daisy chain cable, and accessories – references .....	page 11
■ Index .....	page 12

To be competitive in today's digital era, machine builders must be innovative. Smart machines, those that are better connected, more flexible, more efficient, and safe, are enabling machine builders to innovate in ways never before possible.

EcoStruxure, Schneider Electric's open, IoT-enabled architecture and platform, offers powerful solutions for the digital era. As part of this, EcoStruxure Machine brings powerful opportunities for machine builders and OEMs, empowering them to offer smart machines and compete in the new, digital era.

EcoStruxure Machine brings together key technologies for product connectivity and edge control on premises, and cloud technologies to provide analytics and digital services. EcoStruxure Machine helps you bring more innovation and added value to your customers throughout the entire machine life cycle.

**Innovation at Every Level for Machines is full systems across three layers:**

- Connected products  
Our connected products for measuring, actuating, device level monitoring, and control adhere to open standards to provide unmatched integration opportunities and flexibility
- Edge Control  
We are IIoT-ready with a proven set of tested and validated reference architectures that enable the design of end-to-end open, connected, and interoperable systems based on industry standards. Ethernet and OPC UA facilitates IT/OT convergence meaning machine builders reap benefits from web interfaces and cloud.

- Apps, Analytics & Services  
Seamless integration of machines to the IT layer allows the collection and aggregation of data ready for analysis – for machine builders and end users alike this means increased uptime and the ability to find information faster for more efficient operations and maintenance.

**These levels are completely integrated from shop floor to top floor. And we have cloud offers and end-to-end cybersecurity wrapped around.**

EcoStruxure Machine makes it easier for OEMs/ machine builders to offer their customers smarter machines. The advent of smart machines is driven by the changing needs of end users:

- Evolving workforce
- Reducing costs
- Dynamic markets
- Shorter life cycles
- Prioritizing functional safety and cybersecurity

EcoStruxure Machine provides one solution for the whole machine life cycle:

- With Smart Design & Engineering the time to market is reduced by up to 30% using our automated engineering and the simulation capabilities
- During Commissioning & Operation of the machine, resources such as energy, material and loss can be improved, and with seamless integration to the IT world efficiency can be improved by up to 40%
- Smart Maintenance & Services reduces the time for corrective actions up to 50%

# EcoStruxure™ Machine




\* The Schneider Electric industrial software business and AVEVA have merged to trade as AVEVA Group plc, a UK listed company. The Schneider Electric and Life is On trademarks are owned by Schneider Electric and are being licensed to AVEVA by Schneider Electric.

# Lexium 62 ILM

## Multi-axis integrated servo drives for PacDrive 3 automation solution



Lexium 62 ILM integrated drive range

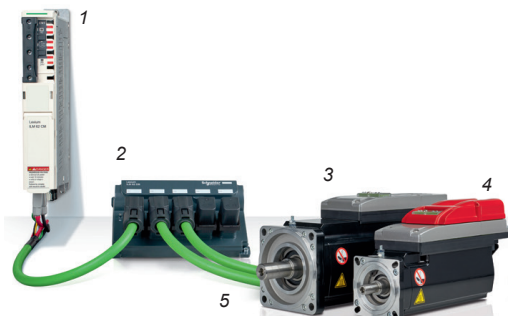

- 1 Lexium 62 ILM connection module
- 2 Lexium 62 ILM distribution box
- 3 Lexium 62 ILM integrated drive
- 4 Lexium 62 ILM safety option module
- 5 Hybrid cable



- > Various dimensions with peak torques of up to 55 Nm (more than 40.57 ft-lbf)
- > Can be combined with single and double drives using a shared power supply
- > 70% shorter cable lengths
- > 90% less wiring time required in the control cabinet
- > 50% less cable installation required in the machine
- > Option module for embedded safety functions STO, SS1, SOS, SS2, SMS, SLS, SDI available

### Presentation

Lexium ILM 62 integrated drive and motor bundle is more than just compact:

- Quick interconnects and hybrid cables for signal and power level
  - Automatic network configuration
  - Diagnostic functions
- Servo modules move servo drives out of the control cabinet and into the field. This reduces wiring and cabling requirements in the control cabinet by up to 90%.
- The only components that remain in the control cabinet are
    - the PacDrive LMC motion controller,
    - the shared power supply,
    - the connection module with the possibility of connecting up to 45 servo modules.
  - The CM feeds power, 24 V for controls and brakes, Inverter Enable and Sercos to the Lexium 62 ILM integrated drive from the same DC bus power supplies as the Lexium 62.

Lexium 62 ILM integrated drives use a flexible approach to cabling, consisting of pre-terminated hybrid cables and Lexium 62 ILM distribution boxes. The network itself is configured as a plug-and-play solution. Compared to conventional servo solutions, this reduces the required cabling by up to 70%, and the labor required for installing the servo solution in the machine frame is reduced by approximately 50%. Lexium 62 ILM integrated drives are the key element in modular machine design. They permit modular design of mechanics, software, and even electronics. This makes Lexium 62 ILM integrated drive an ideal solution for machines with a variety of optional mechatronic modules. Except for additional power supply units that may be required, any later addition of modules to a machine requires no changes in the control cabinet.

### > Lexium 62 ILM integrated drive benefits

- Quick interconnects and hybrid cables for signal and power level
- Plug & Play technology
- Up to 90% less cabinet space
- Up to 90% less wiring time
- Up to 70% less cabling

### > Peak torques of 3.5 to 55 Nm (2.58 to 40.57 ft lbf)

Lexium 62 ILM integrated drives are available in flange sizes of 70, 100, and 140 mm (2.76, 3.94, and 5.52 in.).

Thus they will fully cover a holding torque range of 1.1 to 12.5 Nm (0.81 to 9.22 ft lbf) and/or a peak torque of 3.5 to 55 Nm (2.58 to 40.57 ft lbf).

The models are software-compatible with one another and with Lexium 62 and Lexium 52 series servo drives (1). Additional options include an integrated holding brake, a feathered key groove, and a multi-turn encoder.

The addition of a shaft seal can increase the protection rating from IP54 to IP65.

### > Lexium 62 ILM integrated drive main characteristics

- Supply voltage: 250...700 VDC
- 560 VDC Nominal / rated
- Control voltage: 24 VDC (-20%... +25%)
- Brake supply voltage: 24 VDC (-20%... +25%)
- Cooling: passive
- Protection: IP65

### > Smaller control cabinets




With intelligent servo modules, the servo drives are mounted on the machine frame, leaving only the controller and the shared power supply inside the control cabinet.



(1) Consult catalog:  
ref. [DIA7ED2160305EN](#) ref. [DIA7ED2160304EN](#)

## Lexium 62 ILM integrated servo drive – type code

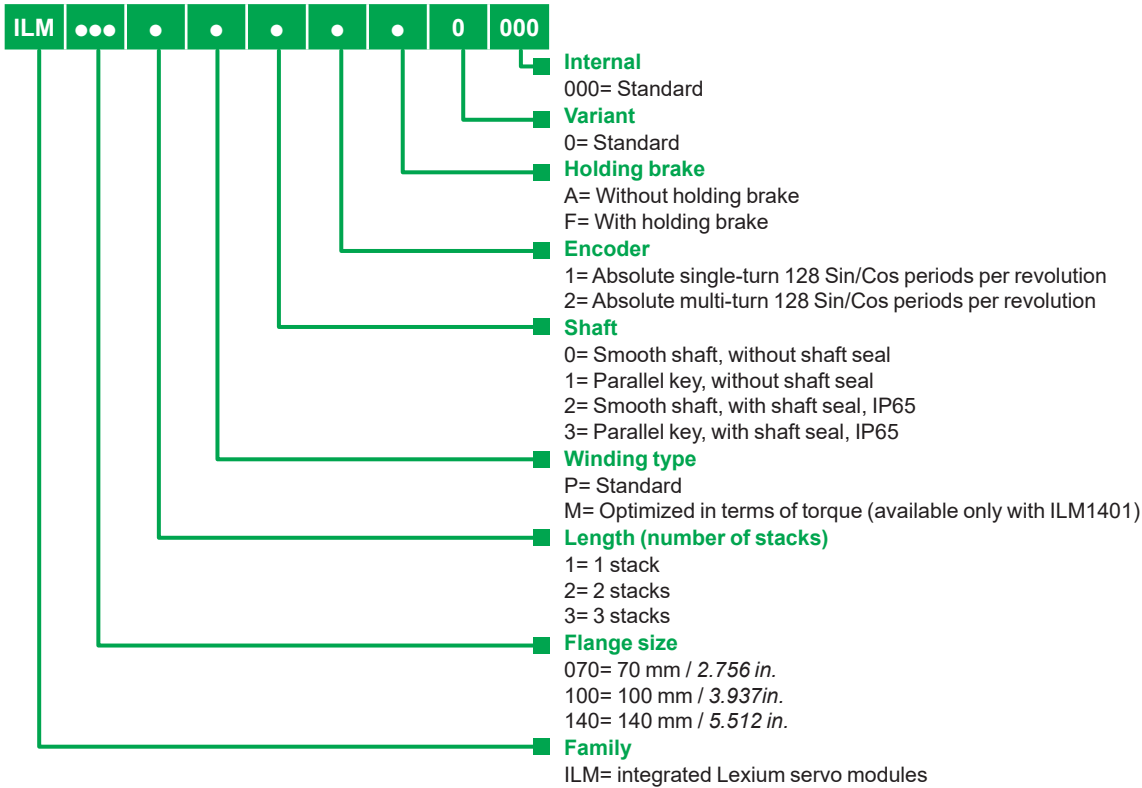

## Lexium 62 ILM integrated drive – references

Designation	Rated servo motor output power Pn		Continuous stall torque Mo		Rated torque Mn	Peak stall torque Mmax	Continuous current Io	Rated current In	Peak current Imax	Rotor moment of inertia Jm	Holding brake moment of inertia Jbr	Rated speed Nn	Reference	Weight (without options)	
	kW	hp	Nm	ft-lbf			Arms			kg cm <sup>2</sup>	kg cm <sup>2</sup>	rpm		kg	lb
Integrated drives	0.31	0.415	1.1	0.811	0.5	3.5	1.55	0.6	5.7	0.25	0.1	6000	ILM0701P	2.7	5.952
	0.72	0.965	1.7	1.253	1.15	7.6	2.5	1.5	11.8	0.41	0.1	6000	ILM0702P	3.4	7.496
	0.72	0.965	2.2	1.622	1.15	8.7	3	1.5	12	0.58	0.3	6000	ILM0703P	4.2	9.259
	0.6	0.804	2.5	1.843	1.9	9.6	1.8	1.4	7.4	1.4	0.7	3000	ILM1001P	4.9	10.803
	0.91	1.219	4.4	3.245	2.9	18.3	2.9	2	13.1	2.31	0.7	3000	ILM1002P	6.4	14.110
	1.1	1.474	5.8	4.277	3.5	28.3	3.6	2.4	21.2	3.22	0.7	3000	ILM1003P	8.1	17.857
	1.45	1.943	7.5	5.531	4.6	27	4.7	2.9	18.8	7.41	1.3	3000	ILM1401P	12.5	27.558
	1.3	1.742	8.5	6.269	8.3	27	3.2	3.15	14.6	7.41	1.3	1500	ILM1401M	12.5	27.558
1.91	2.560	12.5	9.219	9.1	55	4.8	3.7	24	12.68	1.3	2000	ILM1402P	17.2	37.920	

# Lexium 62 ILM


Multiaxis integrated servo drives for PacDrive 3 automation solution

Lexium 62 ILM connection module,

Lexium 62 ILM distribution box

## Lexium 62 ILM connection module – presentation

type	<a href="#">ILM62CMD20A000</a>
Input current A	20
Output current A	20
Continuous output kW/hp	0.95 / 1.273
DC bus input voltage VDC	250...700
DC bus output voltage VDC	250...700
Control voltage VDC	24 VDC (-20%... +25%)
Inverter Enable input voltage VDC	24 (-20%... +25%)
Inverter Enable output voltage VAC	40
Inverter Enable output current A	2
Cooling	Passive
Housing dimensions (D x W x H)	270 x 44.5 x 310 mm (10.630 x 1.752 x 12.205 in.)
Protection rating	IP 20

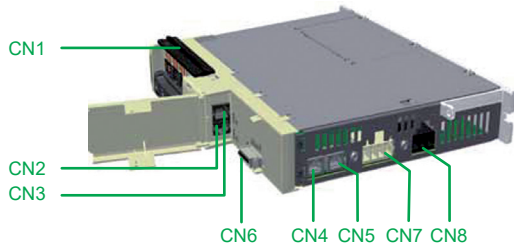

## Lexium 62 ILM connection module – description

Connector	Function
CN1	Busbar module
CN2/CN3	Sercos communication to power supply and additional connection modules
CN4	Inverter Enable 24 VDC
CN5, CN6	Sercos communication to Lexium 62 ILM and Lexium 62 ILM distribution boxes
CN7	Inverter Enable signal output / 24 VDC output
CN8	DC bus output

## Lexium 62 ILM connection module – reference

Designation	Use	Reference	Weight kg/lb
<b>Lexium 62 ILM connection module</b>	To connect the Lexium 62 ILM with Sercos and DC bus	<a href="#">ILM62CMD20A000</a>	3.000/ 6.61

## Lexium 62 ILM distribution box – Presentation


type	<a href="#">ILM62DB4A000</a>
Input current A	20
Output current A	20
DC bus input voltage VDC	250...700 VDC
DC bus output voltage VDC	250...700 VDC
Control voltage VDC	24 VDC (-20%... +25%) / Max. 20 A
Inverter Enable input voltage VDC	24 (-20%... +25%)
Inverter Enable output voltage VAC	40
Inverter Enable output current A	2
Housing dimensions (D x W x H)	151.4 x 230 x 94 mm (5.961 x 9.055 x 3.701 in.)
Protection rating	IP 65
Sercos speed rate	100 Mbps

## Lexium 62 ILM distribution box – description

Connector	Function
CN1	Input (Lexium 62 ILM connection module ILM62CM or Lexium 62 ILM distribution box ILM62DB)
CN2, CN3, CN4, CN5	Output (Lexium 62 ILM distribution box ILM62DB or Lexium 62 ILM integrated drive)

## Lexium 62 ILM distribution box – references

Designation	Use	Reference	Weight kg/lb
<b>Lexium 62 ILM distribution box</b>	To connect several Lexium 62 ILM with Sercos and DC bus	<a href="#">ILM62DB4A000</a>	0.850/ 1.88
<b>Sercos bridge plug</b>	For distribution box (to be ordered separately; not included in ILM62DB4A000)	<a href="#">VW3E6023</a>	0.784/ 1.73



ILM62DB4A000 with 5 x VW3E6023



# Lexium 62 ILM


Multiaxis integrated servo drives for PacDrive 3 automation solution

Lexium 62 ILM digital I/O module (option module),

Lexium 62 ILM safety module (option module)

## Lexium 62 ILM digital I/O module: option module for Lexium 62 ILM integrated drive – presentation

type	VW3E702100000
Digital inputs/outputs	8 digital inputs or outputs (IEC 61131-2 type I) <input type="checkbox"/> 2 inputs configurable as touch probe <input type="checkbox"/> 4 outputs configurable as digital output
Input voltage VDC	<input type="checkbox"/> Range UIN 0 Voltage -3...5 VDC <input type="checkbox"/> Range UIN 1 Voltage 15...30 VDC
Output voltage VDC	$(+U_L - 3V) < U_{OUT} < +U_L$
Control voltage VDC	24 VDC (-15%/+20%) <input type="checkbox"/> with internal I/O supply: max. 300 mA, <input type="checkbox"/> with external I/O supply: max. 80 mA
Overall module current across the 8 inputs/outputs	■ with internal I/O supply: 0.1 A ■ with external I/O supply: 2.0 A
Certifications	CE, cULus
Protection rating	IP 65



VW3E702100000

## Lexium 62 ILM digital I/O module – description

Connector	Function
1	Lexium 62 ILM servo module
2	Lexium 62 ILM digital I/O module
3 (1)	Torx M3x6 screw, protective cover, o-ring seal 2.5x 0.6 mm (0.1 x 0.02 in), protective cover gasket
4 (2)	2x hexagon socket screw M4x50, 2x serrated lock washers M4
5	M12 connector (VW3E4001R030 I/O cable)
6 (2)	1x sealing ring for digital I/O module

## Lexium 62 ILM digital I/O module – reference


Designation	Description	Reference	Weight kg/lb
Lexium 62 ILM digital I/O module	■ 8 digital inputs or outputs (IEC 61131-2 type I) <input type="checkbox"/> 2 inputs configurable as touch probe <input type="checkbox"/> 4 outputs configurable as digital output	VW3E702100000	0.480/1.06

## Accessories for Lexium 62 ILM digital I/O module – reference

Designation item	Description	Reference	Weight kg/lb
I/O cable	■ with M12 connector, angled ■ Length: 3 m (9.843 ft)	VW3E4001R030	0.215/0.47
Terminal block connector	For ABE9 IP67 passive splitter box	(3)	
IP67 passive splitter box	With 4 channels, M12 connector type	(3)	

## Lexium 62 ILM safety module: option module for Lexium 62 ILM integrated drive – presentation

type	VW3E702200000
Safe Motion functions management (via Sercos bus)	Safe Torque off (STO), Safe Stop 1 (SS1), Safe Operating Stop (SOS), Safe Stop 2 (SS2), Safe Maximum Speed (SMS), Safely-Limited Speed (SLS), Safe Direction Indication (SDI)
Certifications	CE, CSA, UL, TÜV, EAC
Standards	EN 61800-3, EN 61800-5-1, EN 61800-5-2, EN ISO 13849-1, EN ISO 13849-2, EN 62061, IEC 61508, IEC 62061, UL 508C, CSA C22.2 No. 14
Protection rating	IP 65



VW3E702200000

## Lexium 62 ILM safety module – description

Function
1 Lexium 62 ILM servo module
2 Lexium 62 ILM Safety option module
3 Torx M3x6 screw, protective cover, insulating washer, 2.5 x 0.6 mm (0.1 x 0.02 in), protective cover gasket
4 2x hexagon socket screw M4x50, 2x serrated lock washers M4
5 1x sealing ring for Safety module
6 Jumpers (J1, J2)
7 2x pressure springs with inner diameter 5 mm (0.20 in) / outer diameter 8 mm (0.31 in)/height 8 mm (0.31 in)

## Lexium 62 ILM safety module – reference

Designation	Description	Reference	Weight kg/lb
Lexium 62 ILM safety module (4)	■ To manage the Safe Motion functions via Sercos bus	VW3E702200000	0.760/1.67

(1) M3x6 screw, protective cover, o-ring seal (2.5x 0.6), protective cover gasket are provided with Lexium 62 ILM drive electronic unit.


(2) Hexagon socket screw M4x50, serrated lock washers M4 are provided with the Digital I/O module.

(3) The ABE9 Solution is disabled (ABE9C1240M + ABE9CM12C = IP67 splitter box + terminal block connector). The recommended replacement is Murrelektronik's reference 27773 (splitter box + terminal block, all-in-1) which customers can obtain via their distributor.

(4) Delivered with 1x sealing ring, 2x hexagon socket screws M4x50, 2x serrated lock washers M4, 2x pressure springs.

## Hybrid cabling examples


### Example 1

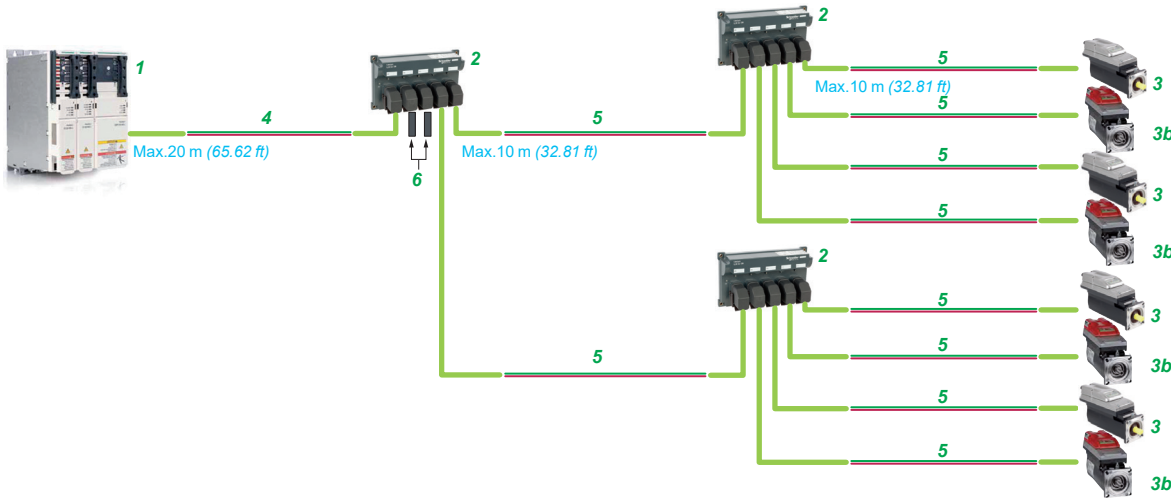

- 1 Lexium 62 ILM connection module ILM62CM
- 2 Lexium 62 ILM distribution box ILM62DB
- 3 Lexium 62 ILM integrated drive
- 3b Lexium 62 ILM integrated drive + Lexium 62 ILM Safety module
- 4 Hybrid cable ILM62CM – ILM62DB4 (1)
- 5 Hybrid cable ILM62DB4 – ILM or ILM62DB4 – ILM62DB4 (1)
- 6 Sercos bridge (2)

(1) Various connector directions available (D1: left, D2: right, D0: straight).  
 (2) Any unused Lexium 62 ILM distribution box ILM62DB connection must be terminated with a Sercos bridge.

### Example 2

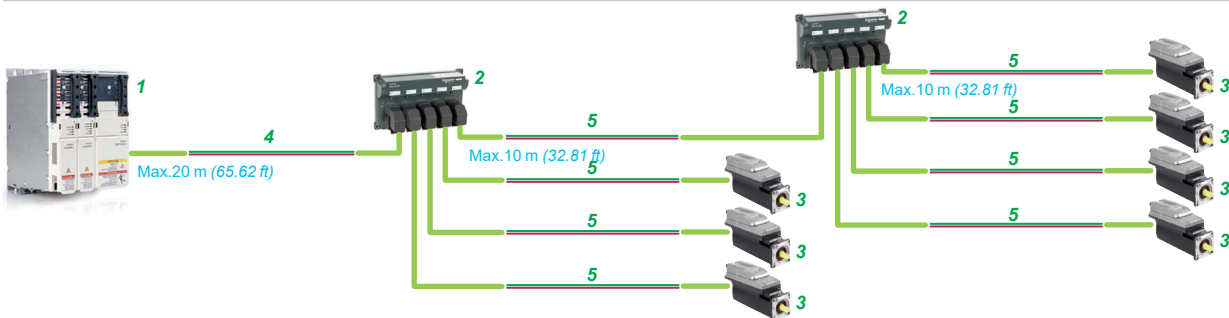

- 1 Lexium 62 ILM connection module ILM62CM
- 2 Lexium 62 ILM distribution box ILM62DB
- 3 Lexium 62 ILM integrated drive
- 4 Hybrid cable ILM62CM – ILM62DB4 (1)
- 5 Hybrid cable ILM62DB4 – ILM or ILM62DB4 – ILM62DB4 (1)

(1) Various connector directions available (D1: left, D2: right, D0: straight).

## Lexium 62 ILM hybrid cable – references

Lexium 62 ILM hybrid cables includes cables for: DC bus, Sercos, 24 V, Inverter Enable signal.

Cable between (1)	and (2)	item no	Connector (1)	Connector (2)	Standard length m / ft	Reference	Weight kg/lb
Connection module	Distribution box	4	–	D0 (straight)	5 / 16.40	VW3E1147R050	–
		4	–	D1 (left)	5 / 16.40	VW3E1141R050	–
		4	–	D2 (right)	5 / 16.40	VW3E1146R050	–
Distribution box	Distribution box or ILM integrated drive	5	D1 (left)	D0 (straight)	2 / 32.81	VW3E1149R020	–
		5	D1 (left)	D1 (left)	2 / 32.81	VW3E1142R020	–
		5	D1 (left)	D2 (right)	2 / 32.81	VW3E1148R020	–
		5	D0 (straight)	D2 (right)	2 / 32.81	VW3E1150R020	–
		5	D0 (straight)	D0 (straight)	2 / 32.81	VW3E1151R020	–
		5	D2 (right)	D2 (right)	2 / 32.81	VW3E1152R020	–

**Note:** Item no 4: available in the following lengths: 2.5, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, and 20 m ; (8.20, 16.40, 19.69, 22.97, 26.25, 29.53, 32.81, 36.09, 39.37, 42.65, 45.93, 49.21, 52.49, 55.77, 59.06, 62.34, and 65.62 ft). See on our [website](#).  
 Item no 5: available in the following lengths: 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10 m ; (3.28, 6.56, 9.84, 13.12, 16.40, 19.69, 22.97, 26.25, 29.53, and 32.81 ft). See on our [website](#).


Cable outlet	Specifications ILM system	Max. distance (m / ft)
on distribution box ILM62DB	Between ILM62CM and ILM62DB4	20 / 65.62
on ILM integrated drive	Between ILM62DB4 and ILM62DB4	10 / 32.81
	Between ILM62DB4 and Lexium 62 ILM integrated drive	10 / 32.81
	Between two active Sercos slaves (1)	50 / 164.04
	Total of cable lengths	200 / 656.17

(1) Lexium 62 ILM connection module ILM62CM and distribution module ILM62DB are not active Sercos slaves.



#### Daisy chain cabling examples


##### Example 3

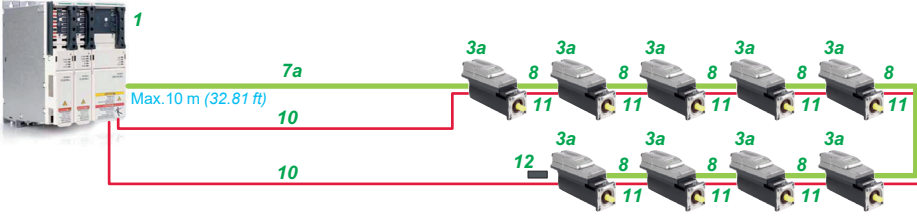

- 1 Lexium 62 ILM connection module ILM62CM
- 3a Lexium 62 ILM integrated drive with daisy chain connection box Type A, B or C
- 7a Power cable ILM62CM – ILM (terminals – M23)
- 8 Power cable ILM – ILM (M23 – M23)
- 10 Sercos cable ILM62CM – ILM (RJ45 – M12)
- 11 Sercos cable ILM – ILM or ILM62DB4 – ILM (M12 – M12)
- 12 Protective cap for power cable connection (1)


Max. 9 ILM servo drives can be linked in one daisy chain line.  
 (1) Each ILM daisy chain line must be terminated with a protective cap for the power cable connection.

##### Example 4

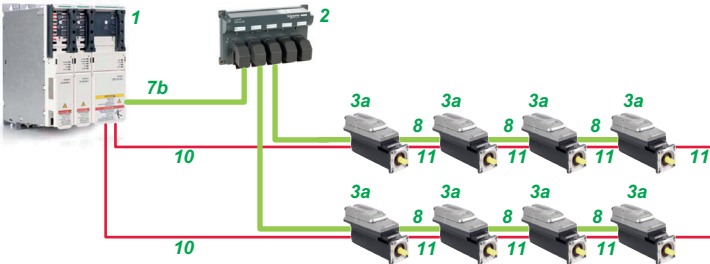

- 1 Lexium 62 ILM connection module ILM62CM
- 2 Lexium 62 ILM distribution box ILM62DB
- 3a Lexium 62 ILM integrated drive with daisy chain connection box Type A, B or C
- 7b Power cable ILM62CM – ILM62DB4
- 8 Power cable ILM – ILM (M23 – M23)
- 10 Sercos cable ILM62CM – ILM (RJ45 – M12)
- 11 Sercos cable ILM – ILM or ILM62DB4 – ILM (M12 – M12)

##### Example 5

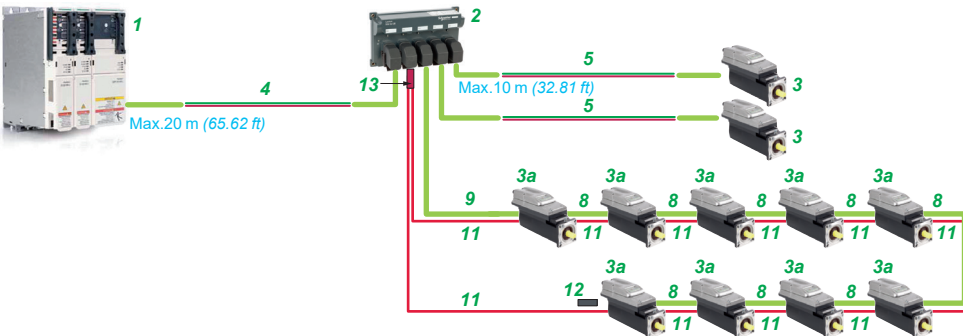


- 1 Lexium 62 ILM connection module ILM62CM
- 2 Lexium 62 ILM distribution box ILM62DB
- 3 Lexium 62 ILM integrated drive
- 3a Lexium 62 ILM integrated drive with daisy chain connection box Type A, B or C
- 4 Hybrid cable ILM62CM – ILM62DB4 (1)
- 5 Hybrid cable ILM62DB4 – ILM or ILM62DB4 – ILM62DB4 (1)
- 8 Power cable ILM – ILM (M23 – M23)
- 9 Power cable ILM62DB4 – ILM (DB-connector – M23)
- 11 Sercos cable ILM – ILM or ILM62DB4 – ILM (M12 – M12)
- 12 Protective cap for power cable connection (2)
- 13 Sercos distribution connector on ILM62DB4

Max. 36 Lexium 62 ILM integrated drives can be connected on one distribution box and four daisy chain lines.  
 (1) Various connector directions available (D1: left, D2: right, D0: straight).  
 (2) Each ILM daisy chain line must be terminated with a protective cap for the power cable connection.

## Daisy chain cabling examples


### Example 6: Sercos and 24 V OUT on ILM62DB4 distribution module

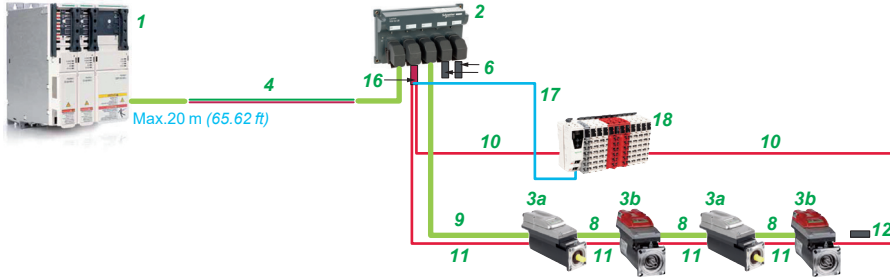

- 1 Lexium 62 ILM connection module ILM62CM
- 2 Lexium 62 ILM distribution box ILM62DB
- 3a Lexium 62 ILM integrated drive with daisy chain connection box Type A, B or C
- 3b Lexium 62 ILM integrated drive with daisy chain connection box Type A, B or C + Lexium 62 ILM Safety module
- 4 Hybrid cable ILM62CM – ILM62DB4 (1)
- 6 Sercos bridge (2)
- 8 Power cable ILM – ILM (M23 – M23)
- 9 Power cable ILM62DB4 – ILM (DB-connector – M23)
- 11 Sercos cable ILM – ILM or ILM62DB4 – ILM (M12 – M12)
- 12 Protective cap for power cable connection (3)
- 16 Sercos distribution connector & 24 V-Out on ILM62DB4
- 17 24 V-Out cable
- 18 Modicon TM5 sercos interface + Modicon TM5 safety I/O modules

- (1) Various connector directions available (D1: left, D2: right, D0: straight).
- (2) Any unused Lexium 62 ILM distribution box ILM62DB must be terminated with a Sercos bridge.
- (3) Each ILM daisy chain line must be terminated with a protective cap for the power cable connection.

## Connectors – description

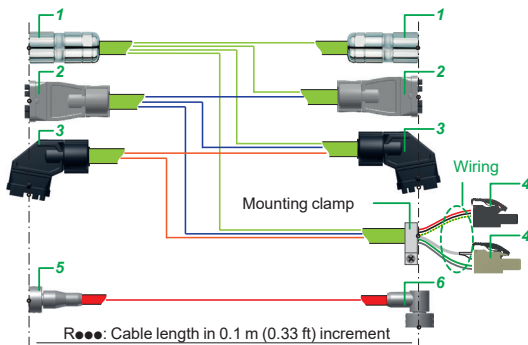

- 1 M23/M40 connector
- 2 HyCon3 D0 connector
- 3 HyCon3 D1/D2 connector
- 4 RJ45 connector
- 5 M12 straight connector
- 6 M12 angled connect

### Cable outlet



# Lexium 62 ILM

## Multiaxis integrated servo drives for PacDrive 3 automation solution

Connection box , Daisy chain cables



ILM62DCA000 (type A)



ILM62DCB000 (type B)



ILM62DCC000 (type C)

Connection box – references					
Designation	item no	Description	Lexium 62 ILM-Servo module compatibility	Reference	Weight kg/lb
Daisy chain connection box assembly	3a	Type A	ILM070, ILM100, ILM140	ILM62DCA000	0.535 / 1.18
	3a	Type B	ILM070, ILM100	ILM62DCB000	0.535 / 1.18
	3a	Type C	ILM140	ILM62DCC000	0.535 / 1.18

Cable length		Max. (m / ft)
Between ILM62CM and ILM62DB4		20 / 65.62
Between ILM62DB4 and ILM62DB4		10 / 32.81
Between ILM62DB4 and Lexium 62 ILM integrated drive		10 / 32.81
Between two Lexium 62 ILM integrated drives		10 / 32.81
Between two active Sercos slaves (1)		50 / 164.04
Total of cable lengths		200 / 656.17
For daisy chain cable: between ILM62DB4 and last Lexium 62 ILM integrated drive		10 / 32.81

(1) Connection module ILM62CM and distribution module box ILM62DB are not active Sercos slaves.

Daisy chain cable – references							
Designation	Between	and	item no	Connector type	Length m / ft	Reference	Weight kg/lb
Power cable	Connection module	ILM integrated drive	7a	Terminals / M23	3 / 9.84	VW3E1155R030	1.367 / 3.01
					5 / 16.40	VW3E1155R050	0.203 / 0.45
					10 / 32.81	VW3E1155R100	1.367 / 3.01
	Connection module	Distribution box	7b	Terminals / DB connector (D1)	3 / 9.84	VW3E115 8R030	1.367 / 3.01
					5 / 16.40	VW3E1158R050	1.367 / 3.01
					10 / 32.81	VW3E1158R100	2.370 / 5.22
	ILM integrated drive	ILM integrated drive	8	M23 / M23	0.3 / 0.98	VW3E1157R003	1.367 / 3.01
					0.7 / 2.30	VW3E1157R007	0.294 / 0.65
					1 / 3.28	VW3E1157R010	0.356 / 0.78
					2 / 6.56	VW3E1157R020	0.562 / 1.24
					3 / 9.84	VW3E1157R030	0.680 / 1.50
	Distribution box	ILM integrated drive	9	DB connector (D1) / M23	4 / 13.12	VW3E1157R040	0.974 / 2.15
					5 / 16.40	VW3E1157R050	1.180 / 2.60
					1 / 3.28	VW3E1164R010	0.381 / 0.84
					2 / 6.56	VW3E1164R020	0.587 / 1.29
Sercos cable	Connection module	ILM integrated drive	10	RJ45 / M12 angled	3 / 9.84	VW3E3065R030	1.367 / 3.01
					5 / 16.40	VW3E3065R050	0.557 / 1.23
					10 / 32.81	VW3E3065R100	1.075 / 2.37
	ILM integrated drive or Distribution box	ILM integrated drive	11	M12 angled / M12 angled	0.3 / 0.98	VW3E3064R003	0.140 / 0.31
					0.7 / 2.30	VW3E3064R007	0.180 / 0.40
					1 / 3.28	VW3E3064R010	0.210 / 0.46
					2 / 6.56	VW3E3064R020	0.310 / 0.68
					3 / 9.84	VW3E3064R030	0.410 / 0.90
					4 / 13.12	VW3E3064R040	1.367 / 3.01
					5 / 16.40	VW3E3064R050	0.610 / 1.34

Daisy chain accessory – references						
Designation	item no	Connector type	Length m / ft	Reference	Weight kg/lb	
Protective cap for power cable connection	12	–	–	ILM62DCZ000	0.235 / 0.52	
Sercos connector distributor in ILM62DB4	13	–	–	VW3E6029	0.700 / 1.54	
Sercos cable (1)	–	Straight M12 / M12 angled	1 / 3.28	VW3E3066R010	0.081 / 0.18	
			3 / 9.84	VW3E3066R030	0.221 / 0.49	
			5 / 16.40	VW3E3066R050	0.361 / 0.80	
Daisy Chain M23 Housing Connector Set	–	–	–	VW3E6046	0.220 / 0.49	
Sercos connector distributor & 24 V-Out on Lexium 62 ILM distribution box ILM62DB (2)	16	–	–	VW3E6047	0.720 / 1.59	
HCN-2 adapter (3)	–	–	–	VW3E6026	0.125 / 0.28	
Hybrid Cable	–	CM / HCN-2	2 / 6.56	VW3E1159R020	0.758 / 1.67	
		HCN-2 / D0	2 / 6.56	VW3E1160R020	0.768 / 1.69	
		HCN-2 / D1	2 / 6.56	VW3E1161R020	0.768 / 1.69	
		HCN-2 / D2	2 / 6.56	VW3E1162R020	0.768 / 1.69	

(1) For connecting additional Sercos devices.

(2) For 24V-Out cable (item 17) (Ref. TCSXCNEFNX●●V/TCSXCNDNFN●●V), please refer to our catalog High-Performance and Safe IP67 distributed I/O System, Ref. DIA3ED2140405EN.

(3) Allows routing of cables through tubes or cable penetrations.



Ref: DIA3ED2140405EN

<b>I</b>		
ILM0701P	5	VW3E6046
ILM0702P	5	VW3E6047
ILM0703P	5	VW3E702100000
ILM1001P	5	VW3E702200000
ILM1002P	5	
ILM1003P	5	
ILM1401M	5	
ILM1401P	5	
ILM1402P	5	
ILM62CMD20A000	6	
ILM62DB4A000	6	
ILM62DCA000	11	
ILM62DCB000	11	
ILM62DCC000	11	
ILM62DCZ000	11	
<b>V</b>		
VW3E1141R050	8	
VW3E1142R020	8	
VW3E1146R050	8	
VW3E1147R050	8	
VW3E1148R020	8	
VW3E1149R020	8	
VW3E1150R020	8	
VW3E1151R020	8	
VW3E1152R020	8	
VW3E1155R030	11	
VW3E1155R050	11	
VW3E1155R100	11	
VW3E1157R003	11	
VW3E1157R007	11	
VW3E1157R010	11	
VW3E1157R020	11	
VW3E1157R030	11	
VW3E1157R040	11	
VW3E1157R050	11	
VW3E1158R030	11	
VW3E1158R050	11	
VW3E1158R100	11	
VW3E1159R020	11	
VW3E1160R020	11	
VW3E1161R020	11	
VW3E1162R020	11	
VW3E1164R010	11	
VW3E1164R020	11	
VW3E1164R030	11	
VW3E3064R003	11	
VW3E3064R007	11	
VW3E3064R010	11	
VW3E3064R020	11	
VW3E3064R030	11	
VW3E3064R040	11	
VW3E3064R050	11	
VW3E3065R030	11	
VW3E3065R050	11	
VW3E3065R100	11	
VW3E3066R010	11	
VW3E3066R030	11	
VW3E3066R050	11	
VW3E4001R030	7	
VW3E6023	6	
VW3E6026	11	
VW3E6029	11	

# mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

## Watch the How-to Videos



### Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




### Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



### Support

- > [Get Quicker Answers Thanks to Online Support](#)



### Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is 

**Schneider**  
Electric

# Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.

SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.



Life Is On



Learn more about our products at  
[www.se.com](http://www.se.com)

Design: Schneider Electric  
Photos: Schneider Electric

**Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier - CS 30323  
F-92500 Rueil-Malmaison Cedex  
France

DIA7ED2160306EN  
October 2024 - V2.0